



WOOD WITHOUT
COMPROMISE





ACCOYA® HAS PROPERTIES
THAT MATCH OR EXCEED
THOSE OF THE BEST
TROPICAL HARDWOODS
AND TREATED WOODS

50 Year Warranty

Rot and Insect Barrier

Paint and Stain Lasts 3-5 Times Longer





SIDING AND EXTERIOR TRIM

Accoya® is the ideal choice where aesthetics and less frequent maintenance are important to you

Dimensional stability, durability and natural UV resistance of Accoya wood confirms a decreased overall life cycle cost

WINDOWS AND DOORS

Swing freely because Accoya® swells very little

Paint and stain lasts 3-5 times longer on Accoya® so your windows and doors will look great for many years


Less maintenance required which increases the cost effectiveness of using Accoya

Provide your customers with the transferable 50 year Accoya® warranty




EXCEPTIONAL EXTERIOR PERFORMANCE

5 Year Weathering Test*

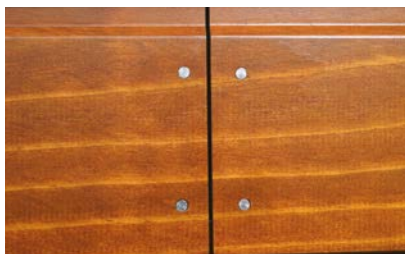

Accoya Modified Wood
Pristine after 5 years exposure.

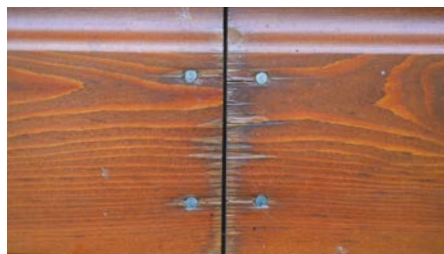

Western Red Cedar
Requires complete refinishing after 5 years.

DECKS AND DOCKS

In specifying decking you want...

Natural beauty, strength and all-weather performance

A lasting wood with outstanding performance characteristics and dimensional stability

A wood that is non-toxic and therefore safe for people and pets

Accoya wood meets all these requirements and more.

* Independent 3rd party testing by BM Trada

ACCOYA® WOOD PRODUCT DETAILS

MATERIAL

Available in A1, A2 and B grades

DIMENSIONS

Thickness 4/4, 6/4, 8/4, 10/4 and 12/4
4/4 is supplied as S2S 22mm

Lengths 8' to 16'

SHRINK AND SWELL

A fraction of the movement of other woods
Accoya® is 0.7% radial and 1.5% tangential

DURABILITY

Class 1, matching and even exceeding the performance of nature's most durable woods

FIRE RATING

Class C Accoya® can be after-market treated with fire retardants to achieve a Class A rating

FSC® CERTIFIED

50 YEAR WARRANTY

This warranty is exclusive to the original owner of any structure on which the Accoya® wood is installed and the next owner of that structure.

- **50 years** when the Accoya® wood product is used above ground
- **25 years** when the Accoya® wood product is used at or below ground level

Access your copy of the Accoya® wood Warranty at www.sierraftp.com

GUIDELINES FOR USE

GLUING

Accoya® wood can be glued using many commonly used wood adhesive systems. Particularly good results are obtained with polyurethane (PU), emulsion polymer isocyanate (EPI), epoxy and phenol resorcinol formaldehyde (PRF) adhesives

FASTENERS & OTHER HARDWARE

Corrosion-resistant, high quality 304 or 316 stainless steel or naval brass fasteners are recommended

COATINGS

Most high quality outdoor approved wood coating systems last three or more times longer

MACHINABILITY

Accoya® machines more like a hardwood and requires no special tools for cross cutting, ripping, planing, routing or drilling

DISPOSAL

Dispose like regular wood



UCS Global

1 866 656 3830 ucsglobal.com

Tel 856 693 7571

sales_global@ucsglobal.comToronto



The mark of responsible forestry